



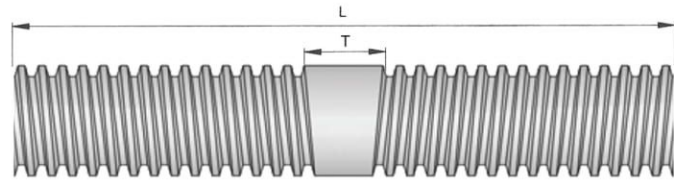

Anyag	R50 acél
Material	R50 steel
Menet pontosság	----
Tolerance	
Felületi keménység	160/180 HB
Surface hardness	

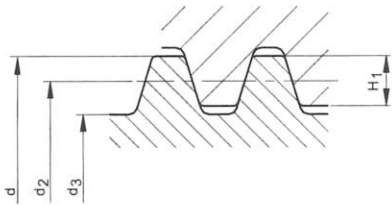

Cikkszám Codes	Ø x emelkedés Ø x lead	Bekezd. Thread starts	Méretek Dimensions (mm)								Menet szög Lead angle	Inercia nyomaték Moment of inertia (mm ⁴)	Tömeg Weight (kg/m)
			d min	d max	d2 min	d2 max	d3 min	d3 max	L	T			
79.001.000	Tr 12x3	1	11,764	12	10,191	10,415	8,135	8,5	3020	20	5°12'	215	0.65
79.001.001	Tr 14x4	1	13,700	14	11,640	11,905	9,074	9,5	3020	20	6°03'	333	0.86
79.001.002	Tr 16x4	1	15,700	16	13,640	13,905	11,074	11,5	3020	20	5°12'	738	1.17
79.001.003	Tr 20x4	1	19,700	20	17,640	17,905	15,074	15,5	3020	20	4°03'	2534	1.94
79.001.004	Tr 22x5	1	21,665	22	19,114	19,394	16,044	16,5	3020	20	4°40'	3232	2.29
79.001.005	Tr 26x5	1	25,665	26	23,094	23,394	20,019	20,5	3020	20	3°52'	7884	3.33
79.001.006	Tr 30x6	1	29,625	30	26,547	26,882	22,463	23,0	3020	20	4°03'	13650	4.38
79.001.007	Tr 36x6	1	35,625	36	32,547	32,882	28,463	29,0	3020	20	3°19'	34540	6.56