




FLEXADUX® P 7 M Street

**Heavy-duty and flexible
Polyurethane ducting**

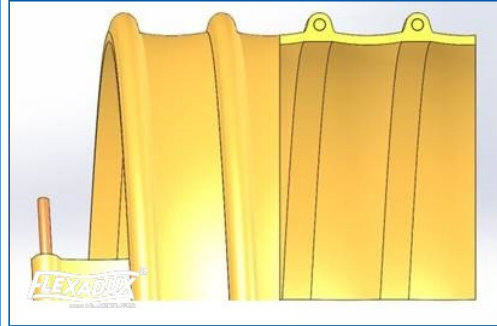

Material:

Polyether-Polyurethane

Colour:

Clear with black cover

Single Length:

10 and 15 m

Temperature Resistance:

- 40° up to + 100° C

Applications:

Suction and discharging of abrasive materials

Quality:

Resistant to hydrolysis and microbes, non toxic, smooth bore - additional improved flow channel by outer folding, good flexibility, excellent abrasion resistance, resistant to oil and petrols, free of halogen and softeners

TECHNICAL DATA

Dia. (mm)	Weight (kg/m)	Material Thickness (mm)	Bending radius (mm)	Max. Work.Press. (bar)	Max. Vacuum (bar)
180	2,30	1,4	220	0,30	0,20
190	2,45	1,4	230	0,30	0,20
200	2,60	1,4	240	0,30	0,20
300	3,80	1,4	360	0,20	0,20

Further diameters available upon request!

Technical data are based on + 23° C.



SCHAUENBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com