

art.DBB FIXED SUPPORTS mod.10/30 (in bronzo) in bronze) of minimal size, with accessories.



art.DNB FIXED SUPPORTS mod.10/30 (in nylon) of minimal size, with accessories.

art.DSB FIXED SUPPORTS mod.10/30 (in steel with resin bush) of minimal size, with accessories.

- Screw tensioning supports -


Assembled supports DBB/DNB/DSB

DBB/DNB/DSB supports - exploded diagram

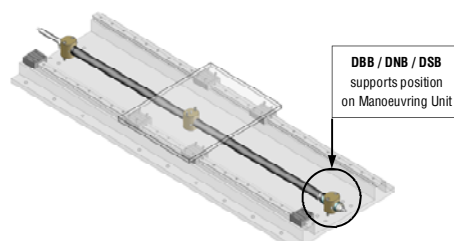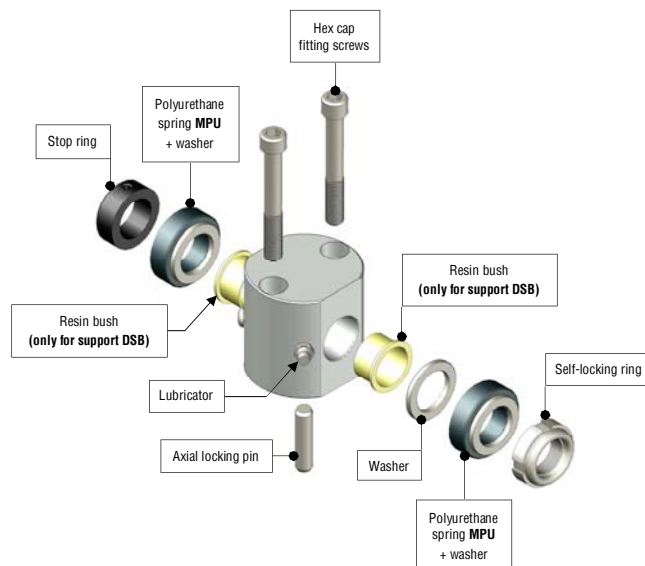

- The DBB supports used with stainless steel trapezoidal screws and the DNB supports used with anodized aluminium alloy or stainless steel trapezoidal screws can be supplied with stainless components upon request.

- Complete diagrams for fitting to the machine are shown on page 65/R.

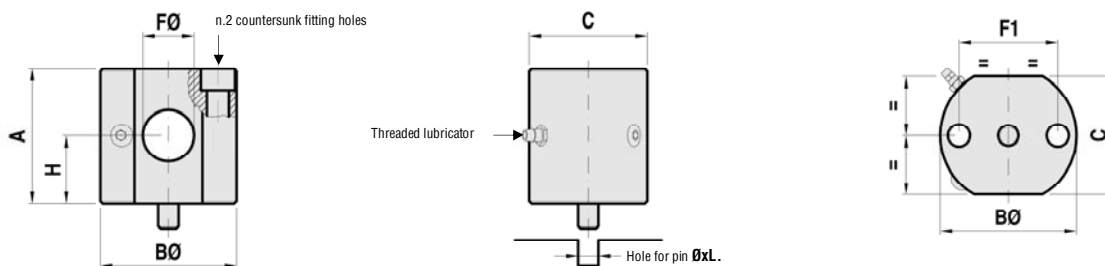

- C = Nett size of the support excluding accessories like ABA, MPU rings, etc.

- Approximate weight with accessories and fitting bolts.

MODELS	CODE DBB-bronze	ART. DBB-bronze	CODE DNB-nylon	ART. DNB-nylon	CODE DSB-steel	ART. DSB-steel	A	BØ	C	H	FØ ^{seat} for screw shank	F1	Hex.cap fitting screws	ØxL. hole for pin	WEIGHT Kg (bronze)	WEIGHT Kg (nylon)	WEIGHT Kg (steel)
mod. 10	304SF310	DBB 10	304SF410	DNB 10	304SF510	DSB 10	29	30	25	15	6	18	M6x35	Ø6x10	0,180	0,050	0,160
mod. 12	304SF312	DBB 12	304SF412	DNB 12	304SF512	DSB 12	34	35	30	17,5	8	22	M6x40	Ø6x10	0,280	0,090	0,250
mod. 16	304SF316	DBB 16	304SF416	DNB 16	304SF516	DSB 16	39	40	34	20	10	25	M8x45	Ø8x10	0,420	0,140	0,370
mod. 20	304SF320	DBB 20	304SF420	DNB 20	304SF520	DSB 20	49	50	44	25	15	33	M8x55	Ø8x10	0,830	0,270	0,730
mod. 25	304SF325	DBB 25	304SF425	DNB 25	304SF525	DSB 25	54	55	46	27,5	17	37	M10x65	Ø10x10	1,100	0,350	0,970
mod. 30	304SF330	DBB 30	304SF430	DNB 30	304SF530	DSB 30	59	60	50	30	20	42	M10x70	Ø10x10	1,430	0,450	1,260

- The above supports shown in the assembled Compact Simple Groups (see previous pages) for which it is possible to calculate the total weight by adding them to the weight of the TR screw using the table on page 65/D.

- To comply with safety regulations, the use of the supplied pin and the fitting nuts and bolts is obligatory, as is ensuring tapping of the thread on materials of adequate thickness and resistance, see page 65/D.

Photos, diagrams and technical data are the exclusive property of Bimeccanica srl, All rights reserved.