

art.DBA **FIXED SUPPORTS mod.10/30 (in bronze)** of minimal size, with accessories.


art.DNA **FIXED SUPPORTS mod.10/30 (in nylon)** of minimal size, with accessories.

art.DSA **FIXED SUPPORTS mod.10/30 (in steel with resin bushes)** of minimal size, with accessories.

- Load bearing support -

Assembled supports DBA/DNA/DSA


DBA/DNA/DSA supports - exploded diagram

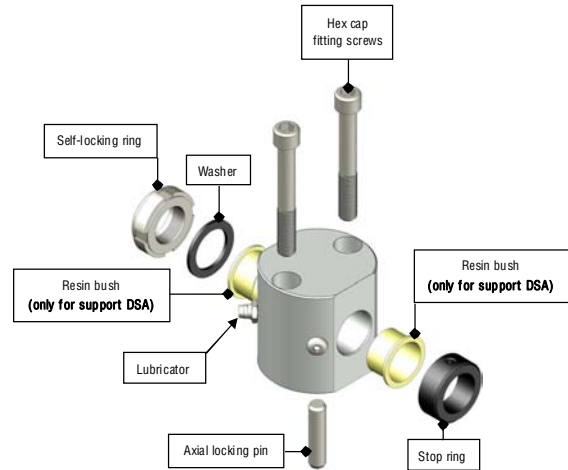

> The above supports are ready for accessories as detailed on pages 88-89.

> The DBA supports, when used with a stainless steel trapezoidal screw and the DNA supports when used with an anodized aluminium alloy or stainless steel screw, can be supplied with stainless components upon request.

> Complete diagrams for fitting to the machine are shown on page 65/R

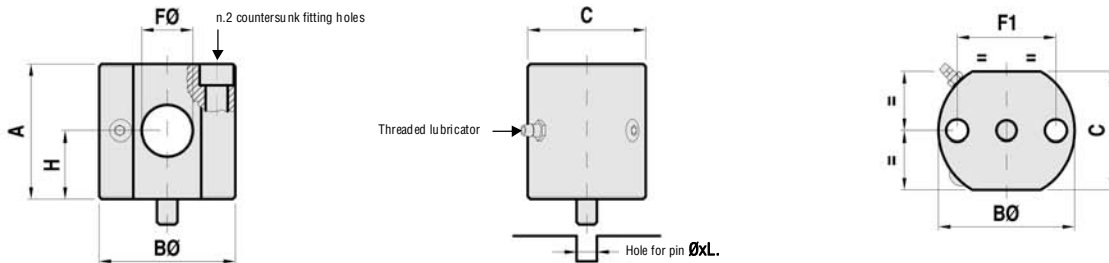

> C = Nett size of the support excluding accessories like ABA, rings, etc.

> Approximate weight with accessories and fitting bolts.

MODELS	CODE DBA-bronze	ART. DBA-bronze	CODE DNA-nylon	ART. DNA-nylon	CODE DSA-steel	ART. DSA-steel	A	BØ	C	H	FØ seat for screw shank	F1	Hex.cap fitting screws	ØxL. hole for pin	WEIGHT Kg (bronze)	WEIGHT Kg (nylon)	WEIGHT Kg (steel)
mod. 10	304SF010	DBA 10	304SF110	DNA 10	304SF210	DSA 10	29	30	25	15	8	18	M6x35	Ø6x10	0,170	0,050	0,150
mod. 12	304SF012	DBA 12	304SF112	DNA 12	304SF212	DSA 12	34	35	30	17,5	10	22	M6x40	Ø6x10	0,270	0,080	0,240
mod. 16	304SF016	DBA 16	304SF116	DNA 16	304SF216	DSA 16	39	40	34	20	15	25	M8x45	Ø8x10	0,400	0,120	0,360
mod. 20	304SF020	DBA 20	304SF120	DNA 20	304SF220	DSA 20	49	50	44	25	15	33	M8x55	Ø8x10	0,800	0,240	0,700
mod. 25	304SF025	DBA 25	304SF125	DNA 25	304SF225	DSA 25	54	55	46	27,5	17	37	M10x65	Ø10x10	1,060	0,320	0,930
mod. 30	304SF030	DBA 30	304SF130	DNA 30	304SF230	DSA 30	59	60	50	30	20	42	M10x70	Ø10x10	1,380	0,410	1,210

> The above supports shown in the assembled Compact Simple Groups (see previous pages) for which it is possible to calculate the total weight by adding them to the weight of the TR screw using the table on page 65/D.

> To comply with safety regulations, the use of the supplied pin and the fitting nuts and bolts is obligatory, as is ensuring tapping of the thread on materials of adequate thickness and resistance, see page 65/D.