


art.DVA

FIXED SUPPORTS mod.10/60 in nitrided steel, with reduced dimensions, axial/radial bearings and accessories.



Assembled DVA support

DVA Support - exploded diagram


Standard fitting on the machine with or without Supports Base

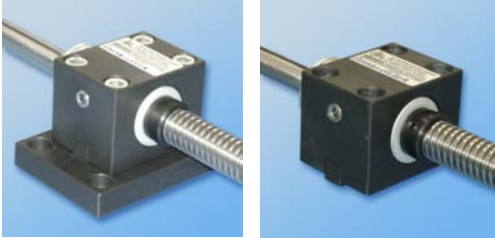

Fitting below machine with or without Supports Base

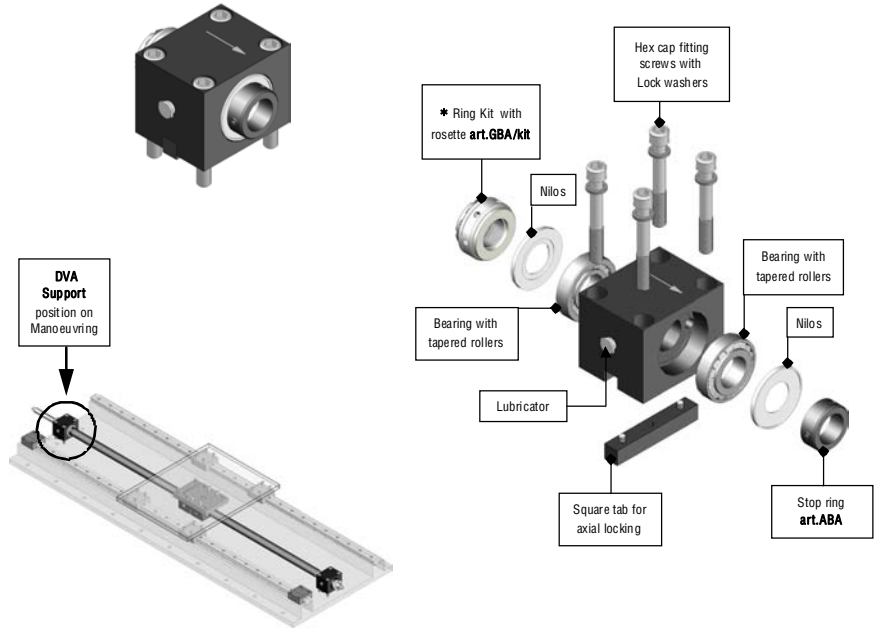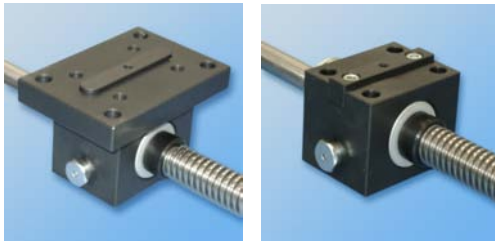

- > **Support DVA** ready for fitting to the machine. Available if necessary, as shown in the two photos, with **Supports Base art.BD LV** (please see page 86).
- > **Accessory support bracket art.SMA** (please see pages 88-89).
- * Alternatively, for particular technical requirements for manual/horizontal movements, the DVA support is available with **self-locking ring GHA** (please see page 51).
- > Complete diagrams showing how to fit to the machine are on pages 101-103.

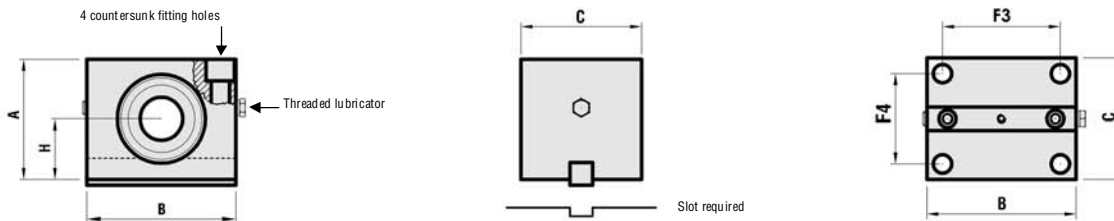

> **C = Net size of the support excluding accessories like ABA, GBA/Kit etc.**

> **Approximate weight with accessories and fitting bolts, excluding Supports Base BD LV.**

MODELS	CODE	ARTICLE	A	B	C	H	Ø Internal of bearings	F3	F4	Hex. Cap screws for fitting	Slot required for fitting	Threaded Lubricator	WEIGHT Kg
mod. 10	300SF010	DVA 10	29	45	30	15	10	33	18	M6x35	Ø10x57x2	M6x1	0,320
mod. 12 14	300SF01214	DVA 12 14	34	50	35	17,5	10	37	22	M6x40	Ø10x62x2	M6x1	0,470
mod. 16	300SF016	DVA 16	39	55	40	20	15	38	24	M8x45	Ø12x69x3	1/8G	0,620
mod. 18	300SF018	DVA 18	44	60	45	22,5	15	44	29	M8x50	Ø12x74x3	1/8G	0,860
mod. 20 22	300SF02022	DVA 20 22	49	65	50	25	15	48	32	M8x55	Ø12x79x3	1/8G	1,200
mod. 24 25 26	300SF0242526	DVA 24 25 26	54	75	55	27,5	17	56	35	M10x65	Ø14x91x4	1/8G	1,680
mod. 28 30 32	300SF0283032	DVA 28 30 32	59	80	60	30	20	60	40	M10x70	Ø14x96x4	1/8G	2,100
mod. 35 36	300SF03536	DVA 35 36	69	90	70	35	25	70	50	M10x80	Ø14x106x4	1/8G	3,180
mod. 40	300SF040	DVA 40	79	100	80	40	30	78	58	M12x90	Ø16x118x4	1/8G	4,480
mod. 45 46	300SF04546	DVA 45 46	84	105	85	42,5	30	83	63	M12x100	Ø16x123x5	1/8G	5,380
mod. 50	300SF050	DVA 50	89	110	90	45	35	88	68	M12x100	Ø16x128x5	1/8G	6,200
mod. 55	300SF055	DVA 55	93	130	100	47	40	102	72	M14x100	Ø16x148x5	1/8G	8,200
mod. 60	300SF060	DVA 60	99	130	100	50	45	102	72	M14x110	Ø16x148x5	1/8G	8,650

- > The supports above are shown assembled in the **Compact Steel Groups** (see preceding pages) for which it is possible to calculate the total weight by adding them to the weight of the TR screw using the table on page 69.
- > **To comply with safety regulations it is obligatory to use the locking tabs, the fitting hardware supplied, and ensuring that the arrows engraved in the supports are all facing in the same direction, which for vertical/oblique movements must be facing downwards.**